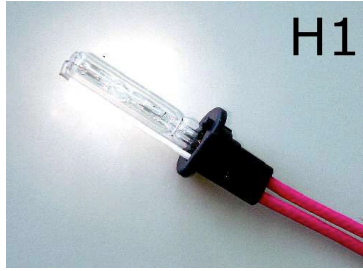
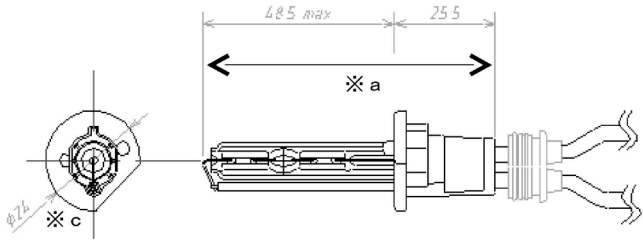

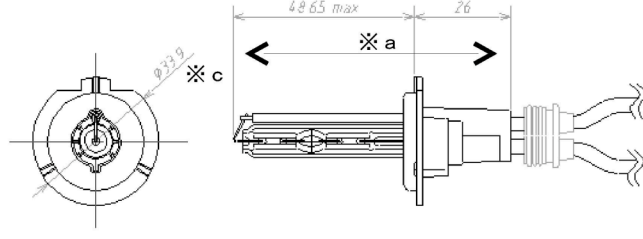

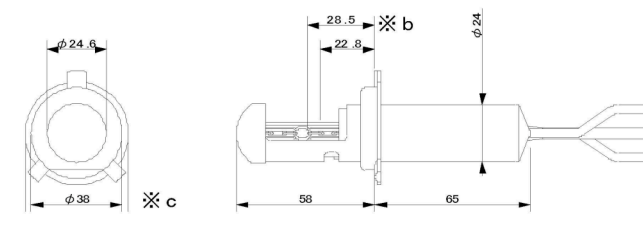

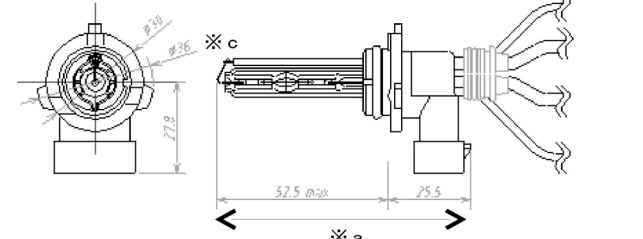



Uppgradera ljuskvaliteten Xenon HID-lampor för eftermontage

		Artikelnummer																	
		12 V	24 V																
	H1		100312 100324																
	H7		100712 100724																
	H4		100412 100424																
	HB3/4		100512 100524																
	Elektroniskt drivdon	Längd: 90 mm Bredd: 78 mm Höjd: 34 mm	<table border="1"> <tr> <td colspan="2">Inspänning, drift</td> </tr> <tr> <td>12 V</td> <td>24 V</td> </tr> <tr> <td>9-16 V</td> <td>20-32 V</td> </tr> <tr> <td>Max 17 V</td> <td>Max 33 V</td> </tr> <tr> <td colspan="2">Strömförbrukning, drift</td> </tr> <tr> <td>12 V</td> <td>24 V</td> </tr> <tr> <td>3,5 A</td> <td>1,75 A</td> </tr> <tr> <td>Max 13 A</td> <td>Max 6,5 A</td> </tr> </table>	Inspänning, drift		12 V	24 V	9-16 V	20-32 V	Max 17 V	Max 33 V	Strömförbrukning, drift		12 V	24 V	3,5 A	1,75 A	Max 13 A	Max 6,5 A
Inspänning, drift																			
12 V	24 V																		
9-16 V	20-32 V																		
Max 17 V	Max 33 V																		
Strömförbrukning, drift																			
12 V	24 V																		
3,5 A	1,75 A																		
Max 13 A	Max 6,5 A																		