

# PROGRAMMABLE 5 CHANNELS - 8 BARS

**700 Watts | RMH 36" | Lens Equipped**  
**Same Spectrum • Less Energy Consumption**  
**Energy Efficient & Even Light Distribution**




**5 Channels**



**Programmable**






**Recipes**

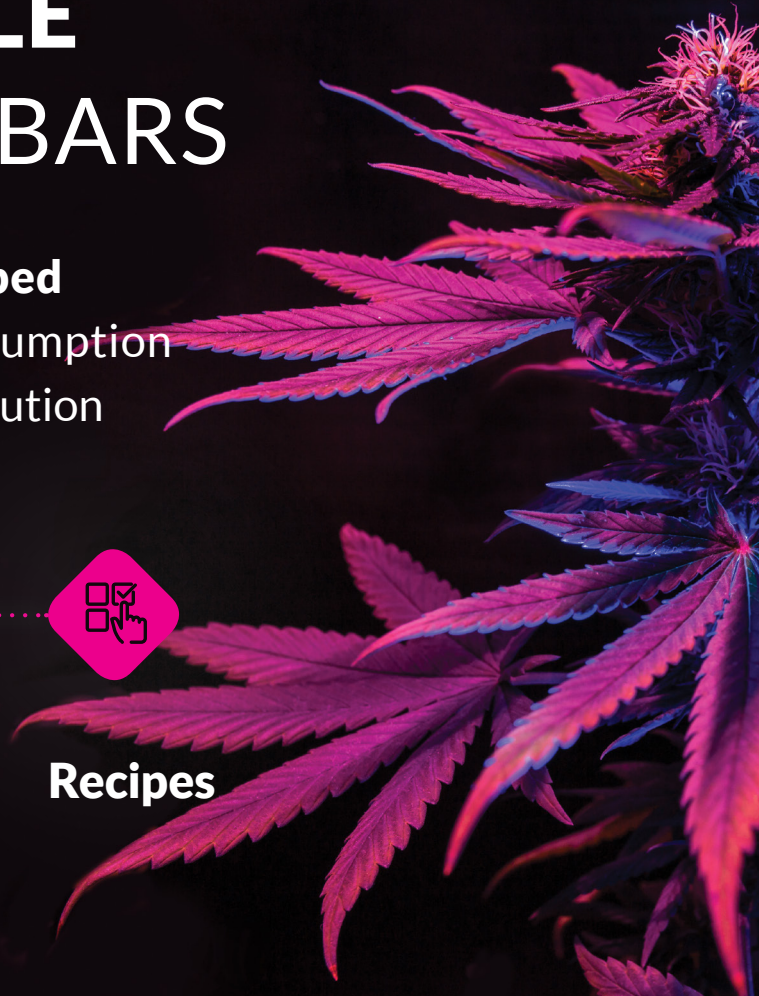

Spectrum	Full programmable   5 Channels   Preset recipes
Dimming	Analog Dimming Technology 0-100%
Control	Megalight PC Software / Megalight External Controller / Customer External Input
Connectivity	Wireless LoRa
PPFD	1200 PPFD
Footprint @ RMH*	4ft * 4ft @ 36"

\*Recommended Mounting Height Above Canopy

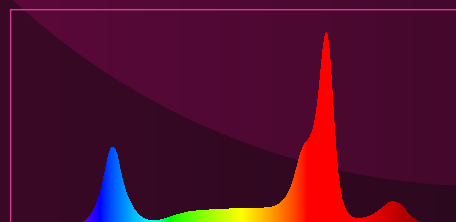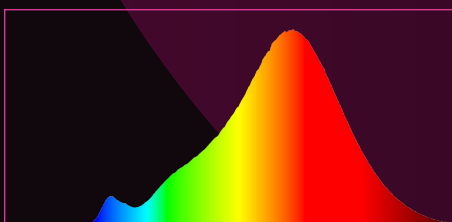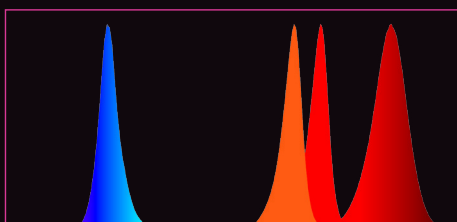

Light Source	Osram & Seoul LEDs
Lens angle	60 degree
Lifespan	>50,000 hours

Mounting	Universal Adjustable Hanging Included
Dimensions & Weight	44.3" x 44" x 2.83"   51 lbs
Ingress Rating	IP65

700	810	960	1040	1220	1040	960	810	700
730	860	1020	1100	1190	1100	1020	860	730
760	890	1060	1170	1240	1170	1060	890	760
780	910	1070	1100	1210	1100	1070	910	780
740	890	1040	1160	1240	1160	1040	890	740
780	910	1070	1100	1210	1100	1070	910	780
760	890	1060	1170	1240	1170	1060	890	760
730	860	1020	1100	1190	1100	1020	860	730
700	810	960	1040	1220	1040	960	810	700

Max Wattage (Line)	700w (All Recipes)
Power supply	Meanwell UHP Series
Input Current	5.8 A @ 120Vac   2.9 A @ 240Vac   2.53 A @ 277Vac
Input Voltage	90-264Vac
Input Power Plug	Customizable
Power Factor	PF≥0.94/230Vac   PF≥0.98/115Vac at Full Load