





FIXED RECIPES CUSTOMIZABLE - 8 BARS

800 Watts | RMH 36" | Lens Equipped
Same Spectrum • Less Energy Consumption
Energy Efficient & Even Light Distribution



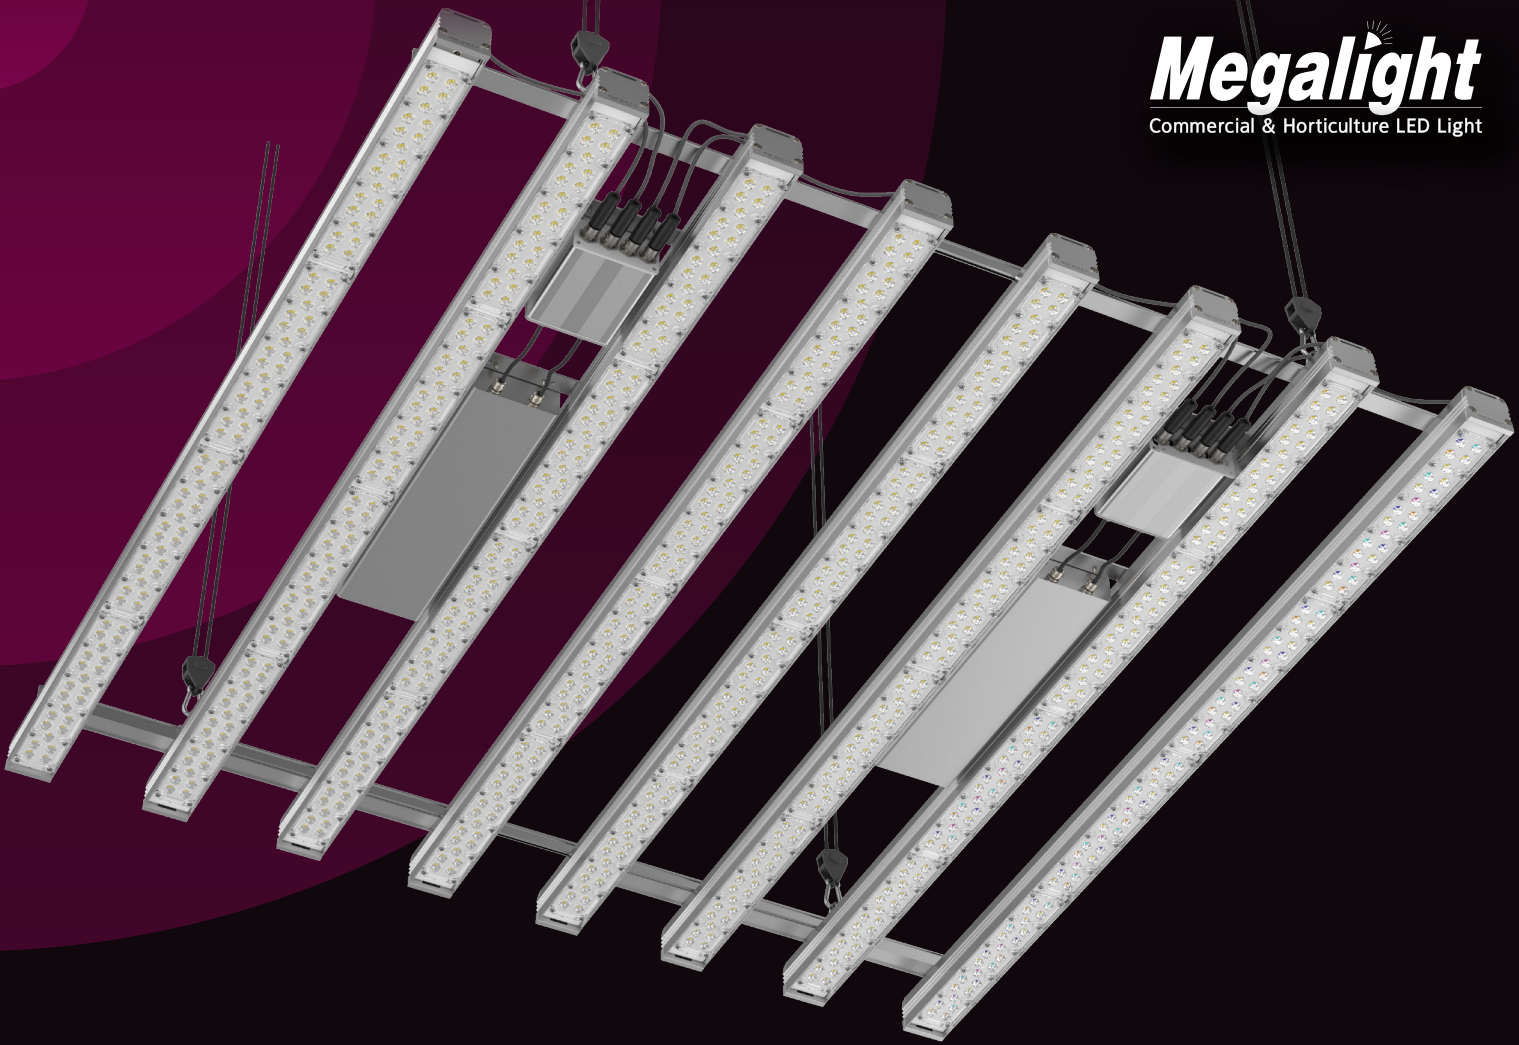


Customizable Recipes

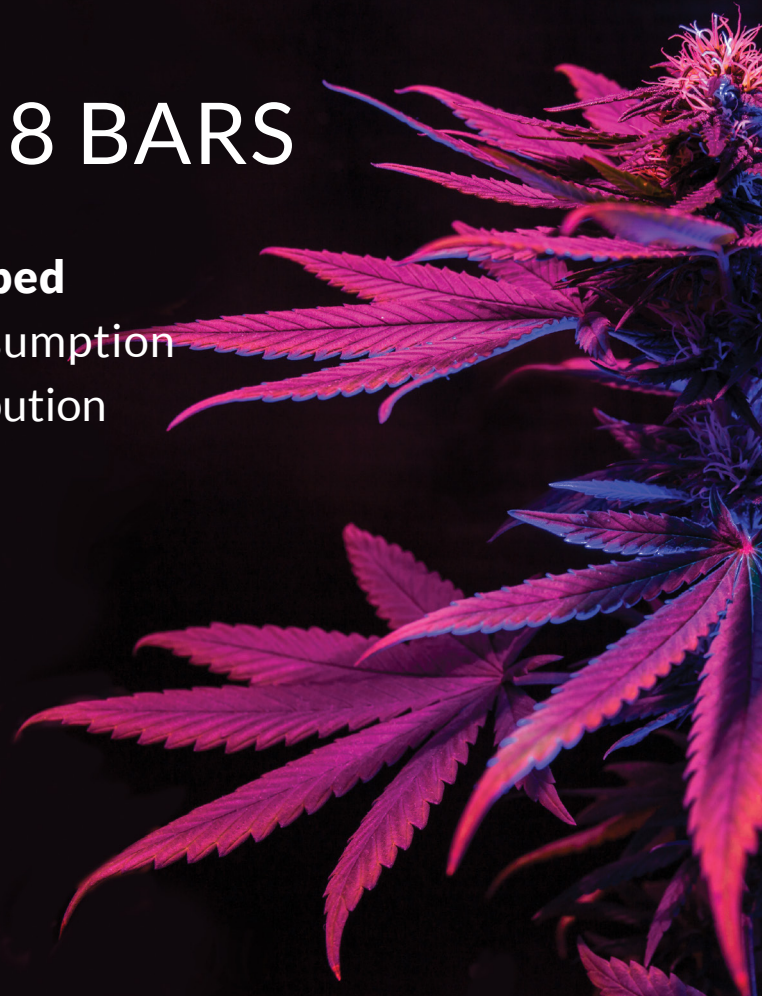

Spectrum	Fixed Customized Recipes
Dimming	10-100%
Control	On-driver Knob / Megalight PC Software / Megalight External Controller / Customer External Input
Connectivity	Wireless LoRa / RJ12
PPFD	1385 PPFD
Footprint @ RMH*	4ft * 4ft @ 36"

*Recommended Mounting Height Above Canopy

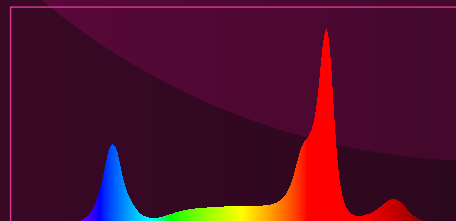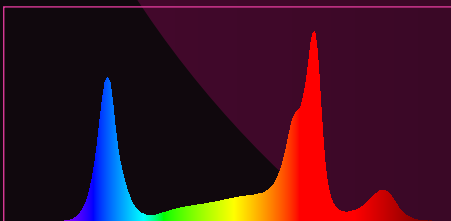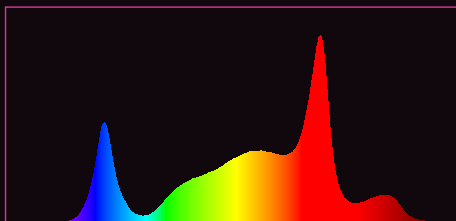

Light Source	Osram & Seoul LEDs
Lens angle	60 degree
Lifespan	>50,000 hours

Mounting	Universal Adjustable Hanging Included
Dimensions & Weight	44.3" x 44" x 2.83" 59 lbs
Ingress Rating	IP65

810	930	1100	1200	1400	1200	1100	930	810
840	990	1175	1265	1370	1265	1175	990	840
875	1025	1220	1345	1425	1345	1220	1025	875
900	1050	1230	1265	1390	1265	1230	1050	900
850	1025	1200	1335	1425	1335	1200	1025	850
900	1050	1230	1265	1390	1265	1230	1050	900
875	1025	1220	1345	1425	1345	1220	1025	875
840	990	1175	1265	1370	1265	1175	990	840
810	930	1100	1200	1400	1200	1100	930	810

Max Wattage (Line)	800w
Power supply	2 Units of Upwertek BLD-610
Input Current	6.7 A @ 120Vac 3.35 A @ 240Vac 2.9 A @ 277Vac
Input Voltage	108-305Vac or 127-420Vdc - 47~63Hz
Input Power Plug	Customizable
Power Factor	>0.9 @ 60-100% Load