




FIXED RECIPES CUSTOMIZABLE - 6 BARS

600 Watts | RMH 32" | Lens Equipped
Same Spectrum • Less Energy Consumption
Energy Efficient & Even Light Distribution






Customizable Recipes

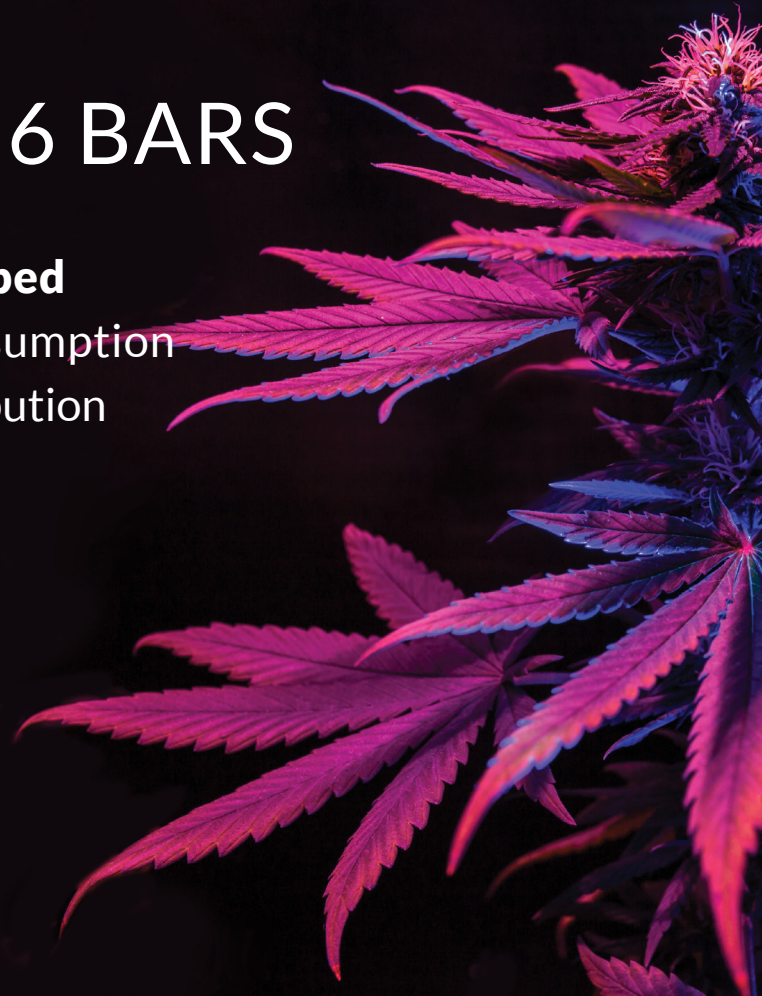

Spectrum	Fixed Customized Recipes
Dimming	10-100%
Control	On-driver Knob / Megalight PC Software / Megalight External Controller / Customer External Input
Connectivity	Wireless LoRa / RJ12
PPFD	980 PPFD
Footprint @ RMH*	4ft * 4ft @ 32"

*Recommended Mounting Height Above Canopy

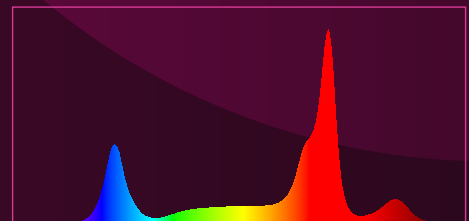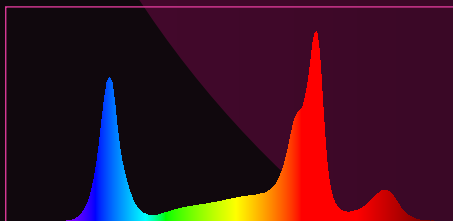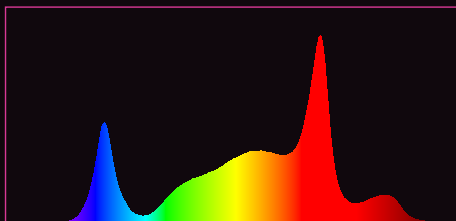

Light Source	Osram & Seoul LEDs
Lens angle	60 degree
Lifespan	>50,000 hours

Mounting	Universal Adjustable Hanging Included
Dimensions & Weight	44.3" x 42" x 2.83" 46.3 lbs
Ingress Rating	IP65

630	720	860	900	920	900	860	720	630
610	725	840	930	980	930	840	725	610
630	760	910	1010	1050	1010	910	760	630
625	760	880	990	1020	990	880	760	625
590	730	860	990	960	990	860	730	590
625	760	880	990	1020	990	880	760	625
630	760	910	1010	1050	1010	910	760	630
610	725	840	930	980	930	840	725	610
630	720	860	900	920	900	860	720	630

Max Wattage (Line)	600w
Power supply	2 Units of Upwertek BLD-400
Input Current	5 A @ 120Vac 2.5 A @ 240Vac 2.15 A @ 277Vac
Input Voltage	108-305Vac or 127-420Vdc - 47~63Hz
Input Power Plug	Customizable
Power Factor	>0.9 @ 60-100% Load